




Service


Carefree production and custom order canopies are constructed using a tapered outside edge on the sides of the canopy.

This provides:

- Better appearance when the awning is retracted;
- Reduced wrinkling; and,
- Improved fabric tension.

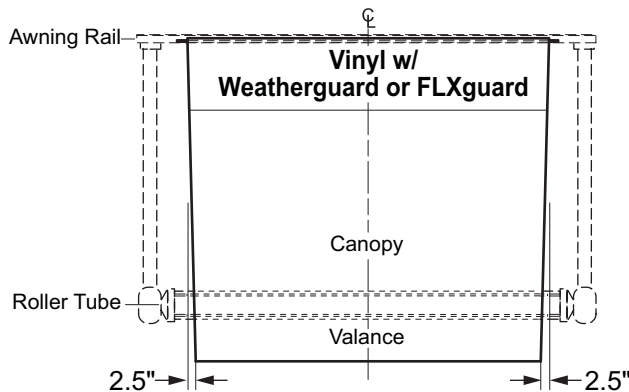

Dimensions are approximate and may vary based on installation and fabric tolerances.

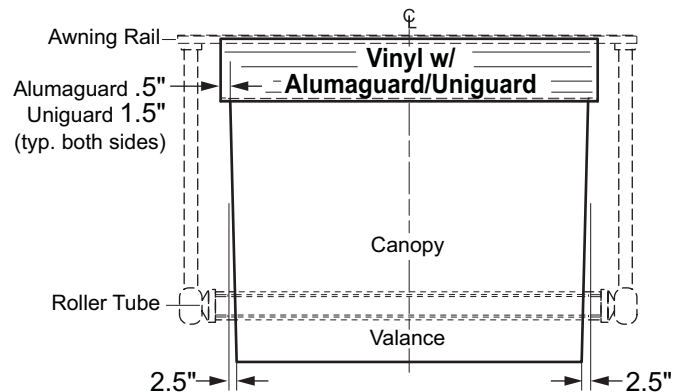

CA006b

When ordering custom replacement canopies:

- Provide the awning's center of arm to center of arm measurement; or,
- Measure the length of the existing canopy fabric at the awning rail polyrod.

NOTE: Custom one-piece canopies are flared. Custom two-piece canopies may or may not be flared based on the material (refer to "series 80" below).

Stocking Canopies (select canopy styles are not flared)

		Flared	Square Cut
Series 30 1 piece construction (with all polyrods are sewn in)			
with vinyl weatherguard		YES	
with premium vinyl		YES	
Series 80 2 piece canopy construction (separate canopy and valance)			
with vinyl weatherguard			YES
with FLXguard		YES	
with premium vinyl		YES	
JU Style 1 piece construction (one polyrod is sewn in for the roller tube, the second polyrod is pressed in during installation)			
with vinyl weatherguard			YES
with FLXguard		YES	
with premium vinyl		YES	
Cut-to-Fit canopies are cut to length during installation (polyrods are welded in)			
all			YES